



Data Communication



Optical Fiber



Tele Communication



IT Product & Services



## FES-SPM-9000

### Fiber Optic Fusion Splicer


#### Overview:

FES-SPM-9000 use the latest core alignment technology with auto focus and six motors, it is a new generation of fiber fusion splicer. It is fully qualified with trunk construction of medium and short distance, FTTH project, security monitoring and other fiber cable splicing projects. The machine uses industrial quad-core CPU, fast response, is currently one of the fastest fiber splicing machine in the market; with 5-inch 800X480 high- resolution screen, the operation is simple and intuitively; and up to 300 times focus magnifications, making it is very easy to observe the fiber with naked eyes. 5 seconds speed core alignment splicing, 15 seconds heating, the working efficiency increased by 50% compared to ordinary splicing machines. Under the conditions of rigorous testing, the performance is still outstanding; toolbox is small, exquisite, durable, and with unique bench design. The design of operating platform reflects the humanistic care; unique lighting design, it is convenient for night construction or repair. Screen brightness is adjustable and it is convenient for outdoor sunshine environment operation. The core parts are using imported brands, aviation metal body material with exquisite details. With the combination of advanced technology and design, the new generation of optical fiber fusion splicer will bring you a reliable and comfortable user experience.



## Built-In Power Meter and VFL:

Effectively measure connection loss, verify continuity, and help assess fiber link transmission quality.

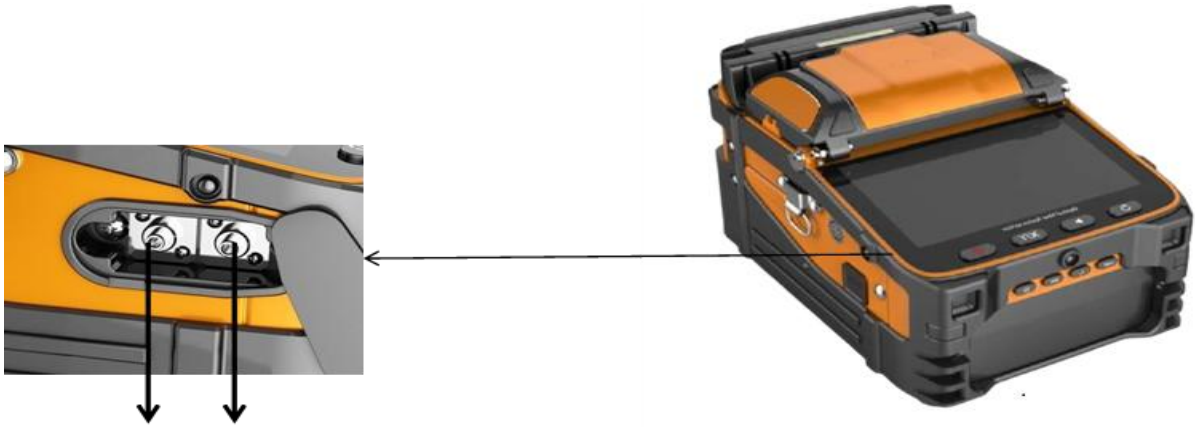

Power VFL Meter

**VFL:** Always on/Flashing/off

**Power Meter:**

850nm/1300nm/1310nm/1490nm/1550nm/1625nm Six states

## TOOLBOX:



Stool can bear 100Kg

Remove the  
Stool



Do not need to take out the  
splicer machine from the  
toolbox while working.

Fiber cleaves  
operator station



Two Layer



## Specifications:

Item	Specification
Fiber alignment	Core/cladding alignment/ Fusion splicer/Manual alignment
Splicing time	5S
Heating Time	15S
Heating Mode	Automatic heating (Preheating)
Focus mode	Six motors Auto focus
Applicable Fibers	SM (G.652&G.657), MM (G.651), DS (G.657), NZDS (G.655)
Splice Loss	0.025db (SM), 0.01db (MM), 0.04db (DS/NZDS)
Control Technology	Real-time control and calibration of fusion ARC
Return Loss	Better then 60db
Fiber diameter	Cladding Diameter: 80-150μm Coating Diameter: 100-1000μm
Fiber Cleave Length	Coating less than 250μm: 8-16mm Coating less than 250-1000μm: 16mm
Software Update Length	Automatically update, Update by a key
Boot time	1 second
Language Setting	10 languages to switch freely
Tension Test	Standard 2N
Fiber Holder	3 in 1 fiber holder, SM, MM, bare fiber, pigtail, rubber-insulated, multi fiber cable
Magnification	300 for X or Y view, 150 for X or Y view
Screen	5.9 inch LCD, Touch screen, colour display
Splicing mode	Normal/high precision splicing
Splicing method	Fully automatic, Step by step splicing
Splicing record storage	Synchronize to the phone, the server to cloud storage unlimited
Built in battery	7800 mA high-capacity lithium battery, charging time ≤ 3.5 hours, continuous splicing and heating about 260 times
Power supply	Input AC100-240V 50 / 60HZ, output DC13.5V / 4.8A, the current power mode can be identified, real-time detection of battery power
Operating Conditions	Temperature -15 ~ +50 °C, humidity: <95% RH (no condensation) Working altitude: 0 ~ 5000m. Resist max. wind speed: ≤ 15m / s
Shinkable tube	60mm,50mm,40mm,25mm
IP Protection	IP54
Product protection	Waterproof, dust proof, shock-resistant

