




FES-GS-2024-4S Copper Series L3+ 10G Routing Switch

Product overview

The new developed FES-GS-2024-4S copper series switches are FES next-generation 10G stackable routing switches that provide fixed gigabit access and 10GE uplink ports. FES-GS-2024-4S copper has advanced hardware and software architecture design. These switches provide high availability, scalability, security, energy efficiency, and ease of operation with innovative features such as **VSF (Virtual Switch Framework)**, IEEE 802.3at optional and redundant power supplies. It is ideal for high-density aggregation or core layer in campus networks or SMB networks, as its high performance, availability and reliability.

The following models are available in the FES-GS-2024-4S copper series.

Appearance	Description
 <p>FES-GS-2024-4S</p>	<ul style="list-style-type: none"> ● 20 x 10/100/1000BaseT + 4 x GE Combo(GT/SFP) + 4 x 10GE(SFP+) ● Fixed Redundant AC+AC Power supply ● 1 console, 1 USB, 1 RJ45 management port ● 1 Reset Button ● Forwarding performance: 95Mpps ● Switching capacity: 128Gbps
 <p>FES-GS-2024-4PS</p>	<ul style="list-style-type: none"> ● 20 x 10/100/1000BaseT + 4 x GE Combo(GT/SFP) + 4 x 10GE(SFP+) ● Fixed Single AC Power supply ● 1 console, 1 USB, 1 RJ45 management port ● 1 Reset Button ● PoE+ up to 370W ● Forwarding performance: 95Mpps ● Switching capacity: 128Gbps
 <p>FES-GS-2048-4S</p>	<ul style="list-style-type: none"> ● 48 x 10/100/1000BaseT + 4 x 10GE(SFP+) ● Fixed Redundant AC+AC Power supply ● 1 console, 1 USB, 1 RJ45 management port ● 1 Reset Button ● Forwarding performance: 131Mpps ● Switching capacity: 176Gbps

Key Features and Highlights

Performance and Scalability

With high switching capacity, FES-GS-2024-4S copper series support wire-speed L2/L3 forwarding and high routing performance for IPv4 and IPv6 protocols.

The 10Gigabit Ethernet connectivity of FES-GS-2024-4S copper is accomplished via a hot-pluggable 10 Gigabit SFP+ transceiver which supports distance up to 300 meters over multimode fiber and 10 to 40km over single-mode fiber (The distance depends the optical module chosen).

VSF(Virtual Switch Framework)

Virtual Switch Framework can virtualize multiple FES switches into one logical device, achieving the sharing of information and data tables between different switches. The performance and ports density of virtualized device are greatly enlarged by times under VSF. VSF also simplifies management work for network administrator and provides more reliability.

Rich L3 Features

FES-GS-2024-4S copper series delivers high-performance, hardware based IP routing. RIP, OSPF and BGP provide dynamic routing by exchanging routing information with other Layer 3 switches and routers. With FES-GS-2024-4S copper series, customers could easily achieve Policy based Route(PBR), which is important when they need multi exit application.

Strong Multicast

FES-GS-2024-4S copper series supports abundant multicast features. In Layer 2, such as IGMPv1/v2/v3 snooping and fast leave. L3 multicast protocols such as IGMPv1/v2/v3, PIM-DM, PIM-SM, PIM-SSM and even MSDP. With Multicast VLAN Register (MVR), multicast receiver/sender control and illegal multicast source detect functions; FES-GS-2024-4S copper series provides great application experience for

customer.

Easy High Reliability network

MRPP is Multi-layer Ring Protection Protocol, which is FES' s private fast Ethernet ring protocol. Comparing to spanning tree protocol, it has advantages of fast convergence, simple protocol calculation, less system resources cost and so on, which can improve the reliability of Ethernet network operation.

Comprehensive QoS

With 8 queues per port, FES-GS-2024-4S copper series enable differentiated management of up to 8 traffic types. The traffic is prioritized according to IEEE802.1p, DSCP, IP precedence and TCP/UDP port number, giving optimal performance to real-time applications such as voice and video.

FES-GS-2024-4S copper series also supports Bi-directional rate-limiting, per port or traffic class, preserves network bandwidth and allows full control of network resources.

Enhanced Security

IEEE 802.1X port-based access control and MAC-based access control ensure all users are authorized before being granted access to the network.

Ingress/Egress Access Control Lists (ACLs) can be used to restrict access to sensitive network resources by denying packets based on L2/L3/L4 headers information. And for some services are based on time, the product can support time based ACL to match the requirement.

Secure Shell (SSH) encrypts network management information via Telnet providing secure network management.

RADIUS Authentication enables centralized control of the switch and restricts unauthorized users from altering the configuration of the switch.

Corporate Office

B-817, 8TH FLOOR, ADVANT NAVIS BUSINESS PARK, SECTOR-142, NOIDA-201301, UTTAR PRAI
INDIA

PHONE: 0120-4277142

EMAIL: sales@foreversystems.in / forever.noida@gmail.com

Specifications

Item	FES-GS-2024-4S	FES-GS-2024-4PS	FES-GS-2048-4S
Performance			
Switching Capacity	128Gbps	128Gbps	176Gbps
Forwarding Rate	95Mpps	95Mpps	131Mpps
Jumbo Frame	10K	10K	10K
MAC Address	16K	16K	16K
ARP Table	4K	4K	4K
Routing Table	13K	13K	13K
ACL Table	3K	3K	3K
L3 Interface	Max 1K	Max 1K	Max 1K
Physical			
Dimension (W*H*D)	440mm x 44mm x 320mm	440mm x 44mm x 320mm	440mm x 44mm x 320mm
Management port	1 x RJ45 Ethernet Management port		
	1x Console port		
	1x USB2.0 interface		
Power Supply	Dual AC:100~240VAC, 50~60Hz	AC:100~240VAC, 50~60Hz	Dual AC: 100~240VAC, 50~60Hz
Power Consumption	<30W	<440W	<50W
PoE	NA	IEEE 802.3af IEEE 802.3at Total PoE power: 375W	NA
Main Features			
L1, L2 Features	IEEE802.3(10Base-T), IEEE802.3u(100Base-TX), IEEE802.3z(1000BASE-X), IEEE802.3ab(1000Base-T), IEEE802.3ae(10GBase), IEEE802.3x, IEEE802.3ak(10GBASE-CX4), Auto MDI/MDIX		
	Port loopback detection LLDP and LLDP-MED UDLD 802.3ad LACP, max 128 group trunks with max 8 ports for each trunk LACP load balance		
	N:1 Port Mirroring RSPAN		
	IEEE802.1d(STP) IEEE802.1w(RSTP) IEEE802.1s(MSTP) Root Guard BPDU Guard BPDU Tunnel		
	802.1Q, 4K VLAN MAC VLAN, Voice VLAN, PVLAN, Protocol VLAN, Multicast VLAN QinQ, Flexible QinQ GVRP N:1 VLAN Translation Broadcast / Multicast / Unicast Storm Control		
	IGMP v1/v2/v3 Snooping and L2 Query, IGMP Proxy, ND Snooping MLDv1/v2 Snooping		
	Port Security		
	Flow Control: HOL, IEEE802.3x		
	Bandwidth Control		

Corporate Office

B-817, 8TH FLOOR, ADVANT NAVIS BUSINESS PARK, SECTOR-142, NOIDA-201301, UTTAR PRAI
INDIA

PHONE: 0120-4277142

EMAIL: sales@foreversystems.in / forever.noida@gmail.com

L3 Features	Static Routing,RIPv1/v2,OSPFv2,BGP4 OSPFv3, BGP4+ OSPF multiple process LPM Routing Policy-based Routing(PBR) for IPv4 and IPv6 VRRP URPF, ECMP BFD
	DVMRP,PIM-DM,PIM-SM,PIM-SSM, Any Cast RP, MSDP Static Multicast Route Multicast Receive Control Illegal Multicast Source Detect
	ARP Guard, Local ARP proxy, Proxy ARP, ARP Binding, Gratuitous ARP, ARP Limit Anti ARP Cheat, Anti ARP Scan
	DNS Client, DNS Relay
	GRE Tunnel
IPv6	6to4 Tunnel, Configured Tunnel, ISATAP Tunnel, GRE Tunnel ICMPv6,ND,DNSv6 IPv6 LPM Routing,IPv6 Policy-based Routing(PBR) IPv6 VRRPv3,IPv6 URPF,IPv6 RA RIPng,OSPFv3,BGP4+ MLD Snooping,IPv6 Multicast VLAN MLDv1/v2, PIM-SM/DM for IPv6, IPv6 Any Cast RP, IPv6 ACL, IPv6 QoS
QoS	8 Queues SWRR, SP, WRR, WDRR, SWDRR Traffic Classification Based on 802.1p COS, ToS, DiffServ DSCP, ACL, port number Traffic Policing PRI Mark/Remark
ACL	IP ACL ,MAC ACL,IP-MAC ACL Standard and Expanded ACL Based on source/destination IP or MAC, IP Protocol, TCP/UDP port, DSCP, ToS, IP Precedence), VLAN, Tag/Untag, CoS Redirect and Statistics Rules can be configured to port, VLAN, VLAN routing interfaces Time Ranged ACL
Security	802.1x AAA Port, MAC based authentication Accounting based on time length and traffic Guest VLAN and auto VLAN RADIUS for IPv4 and IPv6
	TACACS+ for IPv4 and IPv6
	MAB
DHCPv4/v6 Traffic Monitor	DHCP Server/Client for IPv4/IPv6 DHCP Relay/Option 82 DHCP Snooping/Option 82
Traffic Monitor	sFlow Traffic Analysis
Security Network Management	CLI, WEB, Telnet, SNMPv1/v2c/v3 through IPv4 and IPv6 Syslog and external Syslog Server HTTP SSL SNMP MIB, SNMP TRAP, RMOM 1,2,3,9 FTP/TFTP SNTP/NTP Authentication by Radius/TACACS SSH v1/v2 Dual firmware images/ Configuration files 802.3ah OAM, 802.1ag OAM
Data Center Features	VSF(Virtual Switch Framework)

Corporate Office


B-817, 8TH FLOOR, ADVANT NAVIS BUSINESS PARK, SECTOR-142, NOIDA-201301, UTTAR PRAI
INDIA

PHONE: 0120-4277142

EMAIL: sales@foreversystems.in / forever.noida@gmail.com

Application

Aggregation switches providing gigabit downlink and 10G uplink in campus or enterprise network

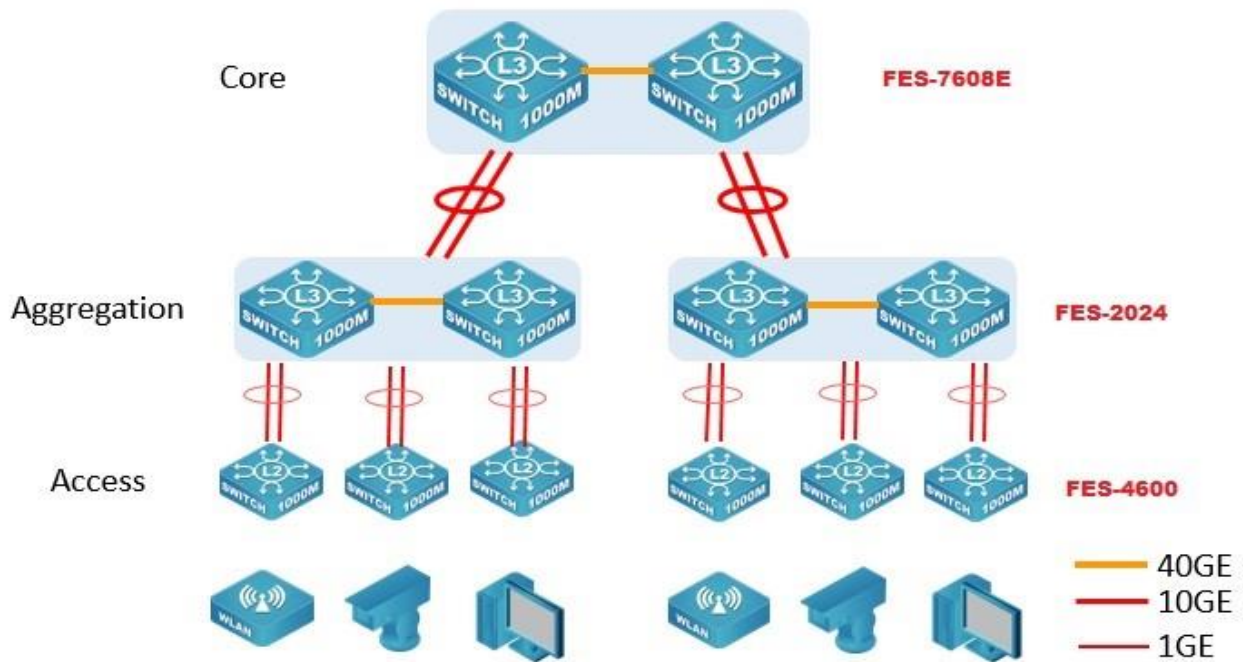

Order Information

Product	Description
FES-GS-2024-4S	10G Ethernet Routing Switch, 20 x 10/100/1000BaseT + 4 x GE Combo(GT/SFP) + 4 x 10GE(SFP+), dual AC redundancy power supply.
FES-GS-2024-4PS	10G PoE Ethernet Routing Switch, 20 x 10/100/1000BaseT + 4 x GE Combo(GT/SFP) + 4 x 10GE(SFP+), One Fixed AC power supply. up to 375W for PoE
FES-GS-2048-4S	10G Ethernet Routing Switch, 48 x 10/100/1000BaseT + 4 x 10GE(SFP+), dual AC redundancy power supply.)

Corporate Office

B-817, 8TH FLOOR, ADVANT NAVIS BUSINESS PARK, SECTOR-142, NOIDA-201301, UTTAR PRADESH, INDIA

PHONE: 0120-4277142

EMAIL: sales@foreversystems.in / forever.noida@gmail.com